


# KEA 140 SQUARE 8023

SKU 1391005

astro

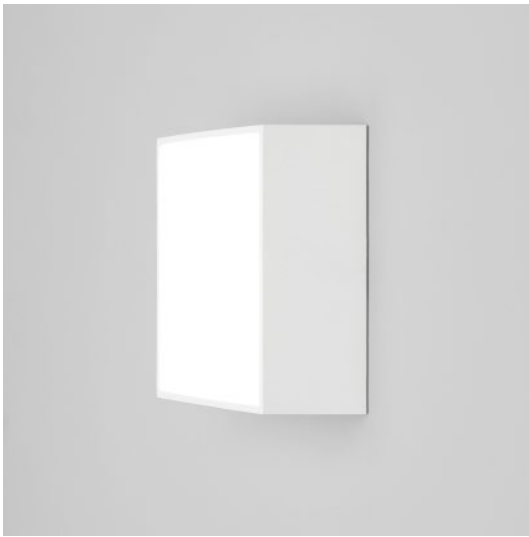

## PRODUCT SPECIFICATION

### GENERAL

<b>FINISH:</b>	Textured White	<b>CABLE LENGTH:</b>	Not Applicable
<b>MAIN MATERIAL:</b>	Metal - Aluminium	<b>GROSS WEIGHT:</b>	1.12 (Kg)
<b>DIMENSIONS:</b>	H: 141mm W: 141mm D: 56mm	<b>CLASS:</b>	CE (Class I)
<b>INSTALLATION ORIENTATION:</b>	Ceiling Mount / Wall Mount	<b>IP RATING:</b>	IP65
<b>CUT OUT HOLE:</b>	Not Applicable	<b>BATHROOM ZONE:</b>	Zone 1, 2, 3
<b>RECESS DEPTH:</b>	Not Applicable	<b>VOLTAGE:</b>	Mains 230 (V)
<b>FIRE RATING:</b>	Not Applicable	<b>PRODUCT F MARK:</b>	Not Applicable

### LAMP

<b>LIGHT SOURCE:</b>	LED	<b>MACADAM ELLIPSE:</b>	To Be Advised
<b>MAXIMUM WATTAGE:</b>	5.3W	<b>UGR:</b>	Not Applicable
<b>MAXIMUM LAMP LENGTH:</b>	Not Applicable	<b>BEAM ANGLE:</b>	Not Applicable
<b>LAMP INCLUDED?</b>	Yes (Integral)	<b>TILT ADJUSTMENT ANGLE:</b>	Not Applicable
<b>LUMINOUS FLUX:</b>	347.6 (lm)	<b>ROTATION ADJUSTMENT ANGLE:</b>	Not Applicable
<b>COLOUR TEMP:</b>	3000K	<b>AVERAGE LIFESPAN:</b>	50,000 (hrs)
<b>CRI:</b>	>80	<b>L70:</b>	To Be Advised
<b>R9:</b>	21.0		

### ELECTRICAL

<b>SWITCHED:</b>	No	<b>SUPPLY FREQUENCY:</b>	50/60 (Hz)
<b>DIMMABLE:</b>	No	<b>DRIVER / BALLAST VOLTAGE:</b>	100-240 (V)
<b>DIMMING METHOD:</b>	Not Applicable	<b>DRIVER AVERAGE LIFESPAN:</b>	To Be Advised
<b>DRIVER OUTPUT CURRENT:</b>	350mA	<b>EFFICACY:</b>	65.58 (lm/W)
<b>DRIVER OUTPUT VOLTAGE:</b>	Not Applicable	<b>DRIVER / BALLAST INCLUDED?</b>	Yes (Integral)

## ADDITIONAL INFORMATION

### ONEROUS ENVIRONMENTS

All of our exterior products are covered by a 3 year guarantee; however this does not apply to any that are installed within 5 miles of the coast. For these environments, please filter products on the Astro website by "Coastal".



BOX QUANTITY x 12



# PRODUCT ELEVATIONS

---

